


EXISTING WORN FLOOR


CONSTRUCTION DIAGRAMS
February 1, 2001

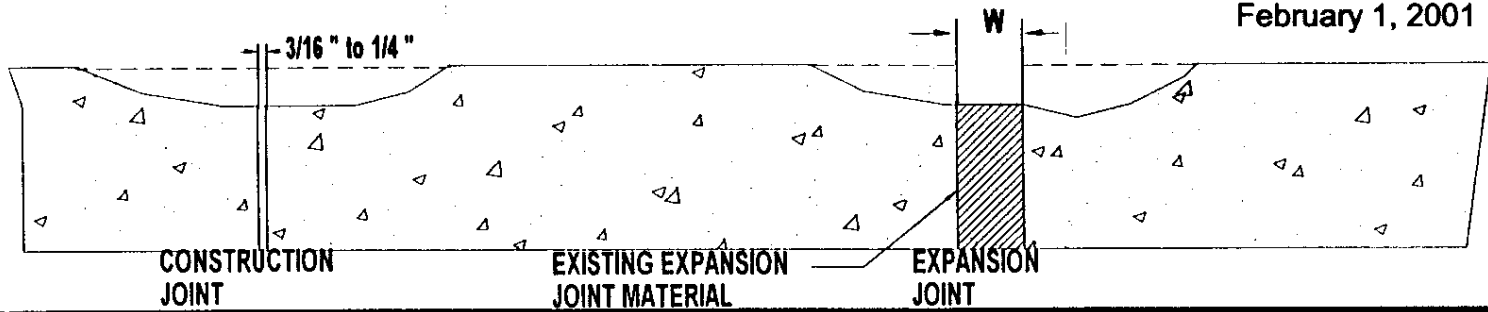

PREPARATION

POLYETHYLENE WRAPPED BOARD
REMOVE SHADED AREAS

PRIME ALL SURFACES

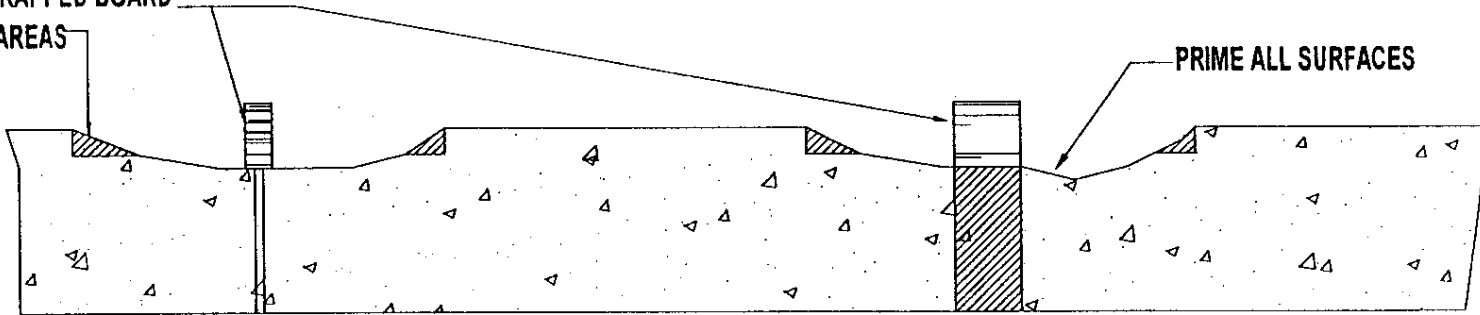

REPAIRS


GROUT OR POLYMER CONCRETE

FLEXIBLE JOINT COMPOUND

GROUT OR POLYMER CONCRETE

CLOSED CELL FOAM

Depth of flexible joint compound 1/2" or 1/2 W

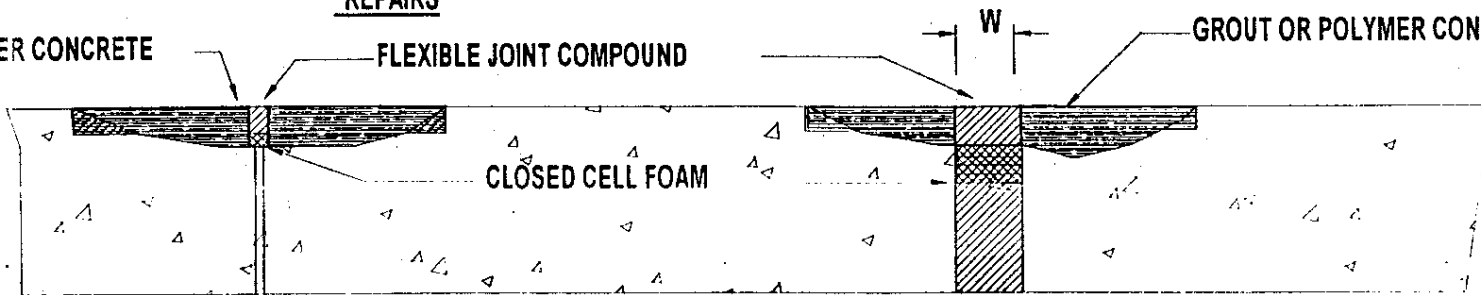

REPAIRS ON DAMAGED CONCRETE FLOORS

CPD-1028

BLOME
INTERNATIONAL

1450 Hoff Industrial Drive
O'Fallon, MO 63366
636-379-9119 fax 636-379-0388
www.blome.com e-mail info@blome.com